


Digi Modem Text Card Programming Menu

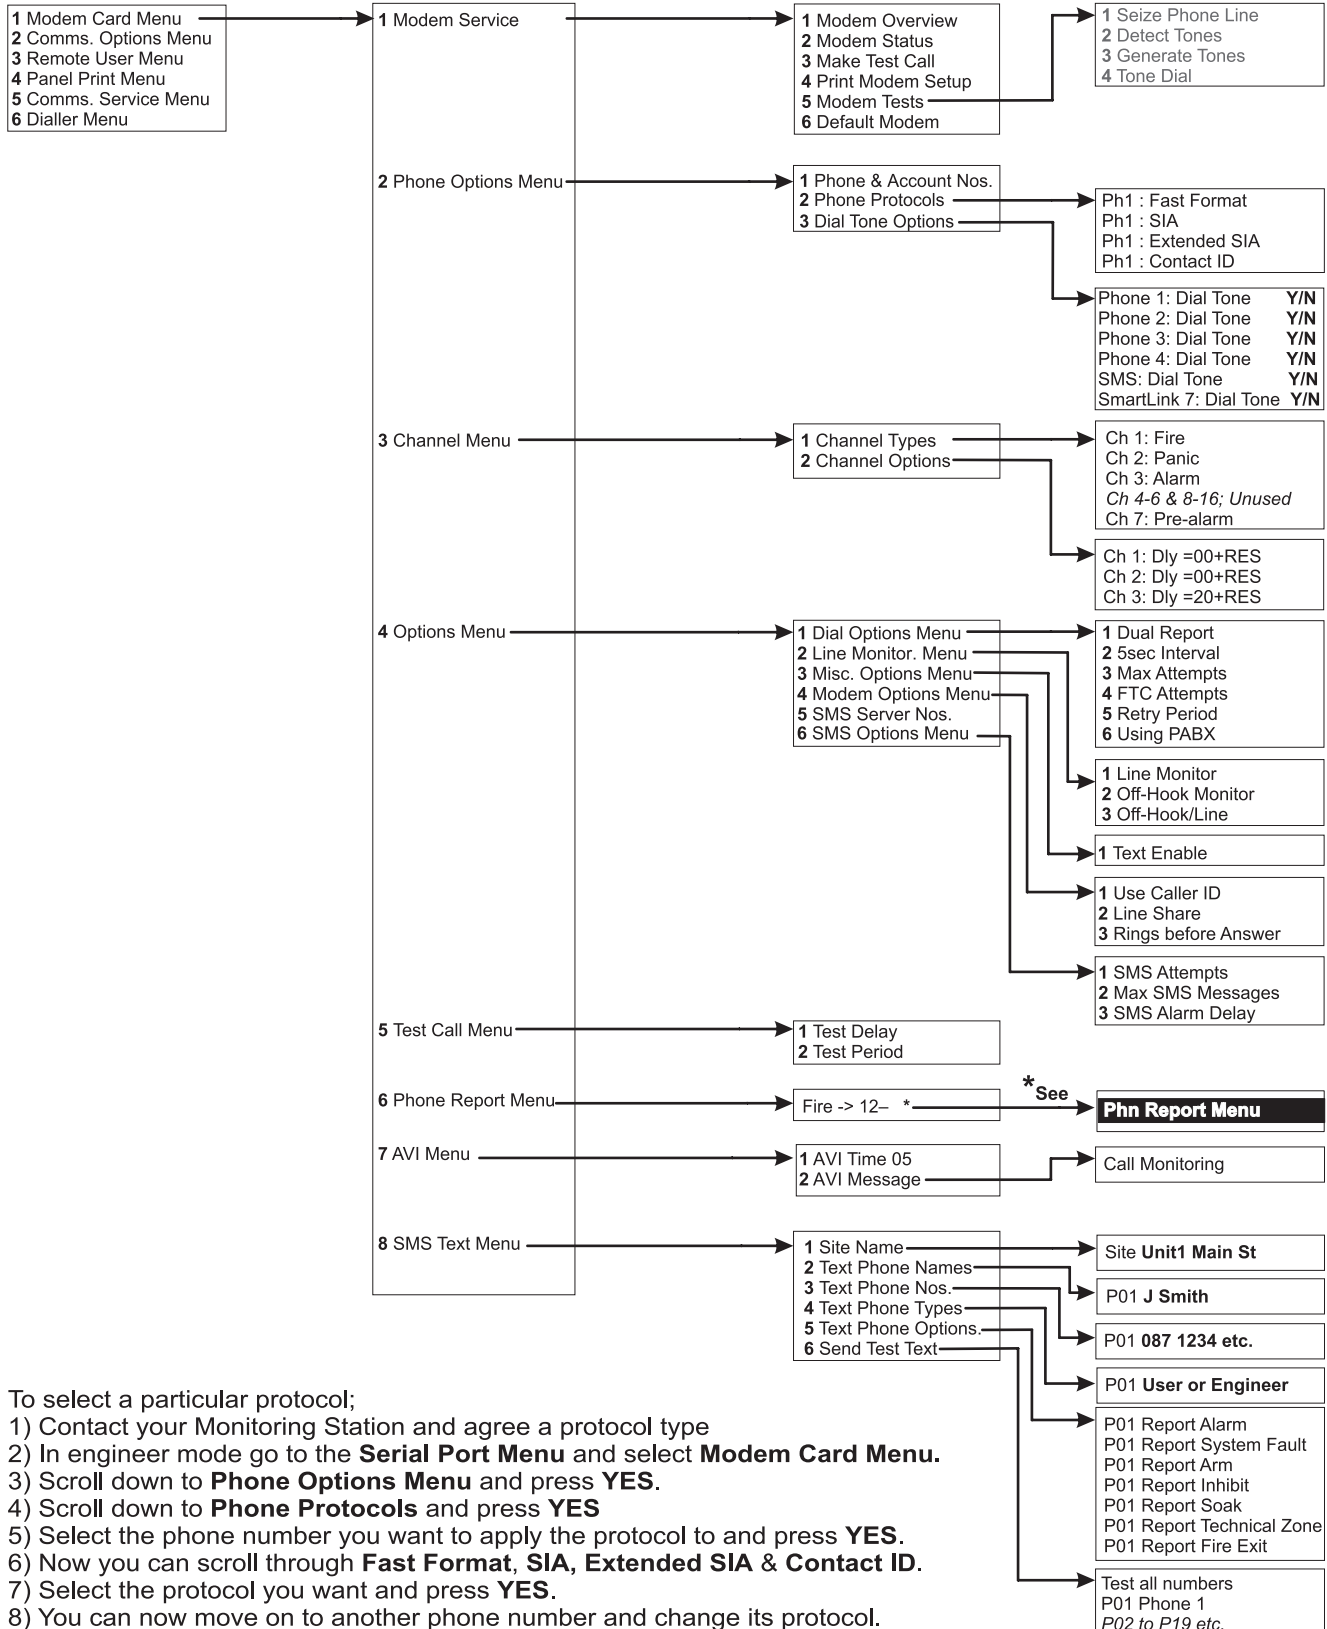

To select a particular protocol;

- 1) Contact your Monitoring Station and agree a protocol type
- 2) In engineer mode go to the **Serial Port Menu** and select **Modem Card Menu**.
- 3) Scroll down to **Phone Options Menu** and press **YES**.
- 4) Scroll down to **Phone Protocols** and press **YES**
- 5) Select the phone number you want to apply the protocol to and press **YES**.
- 6) Now you can scroll through **Fast Format, SIA, Extended SIA & Contact ID**.
- 7) Select the protocol you want and press **YES**.
- 8) You can now move on to another phone number and change its protocol.

Notes: - All phone numbers are defaulted to **Fast Format**.

- In software versions higher than 7.0 you can now delay an SMS alarm message and limit the number of SMS alarm messages sent. See **SMS Options Menu** above.

- **Channel Types** and **Channel Options** are not required for SIA, Extended SIA and Contact ID. However they can be used with those protocols to control when an event is reported e.g. if you want to delay a Fire event report by 30 seconds change **Ch 1: Dly=00+RES** to **Ch1: Dly=30+RES**.

Default Engineer Code - 04567
Default User Code- 01111